

Beacons – overview

LED, halogen and accessories

All beacons are ECE and SAE tested. The operating temperature lies between -40°C and +60 °C.



LED					
RotaLED Compact*		<p>Fixed mounting (height 119 mm, Ø 165 mm) 2XD 013 979-001*, flashing 2RL 014 979-001, rotating</p>	<p>Flexible pipe-socket mounting 2XD 013 979-011, flashing 2RL 014 979-011, rotating</p>	<p>Magnetic attachment 2XD 013 979-021, flashing 2RL 014 979-021, rotating</p>	<p>Warning effect </p> <p>Robustness </p> <p>Service life </p> <p>Suitable for continuous operation </p>
* = also available in 30–110 V for forklift trucks.					
KL 7000 LED		<p>Fixed mounting (height 119 mm, Ø 165 mm) 2RL 011 484-001, rotating 2XD 012 972-001, flashing</p>	<p>Pipe-socket mounting 2RL 011 484-011, rotating 2XD 012 972-011, flashing</p>	<p>Magnetic attachment 2RL 011 484-021, rotating 2XD 012 972-021, flashing</p>	<p>Warning effect </p> <p>Robustness </p> <p>Service life </p> <p>Suitable for continuous operation </p>
Rota LED		<p>Fixed mounting (height 124 mm, Ø 132 mm) 2RL 010 979-001, rotating 2XD 012 878-001, flashing</p>	<p>Flexible pipe-socket mounting 2RL 010 979-011, rotating 2XD 012 878-011, flashing</p>	<p>Magnetic attachment 2RL 010 979-021, rotating 2XD 012 878-021, flashing</p>	<p>Warning effect </p> <p>Robustness </p> <p>Service life </p> <p>Suitable for continuous operation </p>
K-LED Rebelution		<p>Fixed mounting (height 60 mm, Ø 149 mm) 2RL 455 256-001, rotating 2XD 455 255-001, flashing</p>	<p>Flexible pipe-socket mounting On request, rotating On request, flashing</p>	<p>Magnetic attachment On request, rotating On request, flashing</p>	<p>Warning effect </p> <p>Robustness </p> <p>Service life </p> <p>Suitable for continuous operation </p>
Only ECE approval					
K-LED Blizzard		<p>Fixed mounting (height 88 mm, Ø 149 mm) 2XD 012 980-001, flashing</p>	<p>Flexible pipe-socket mounting 2XD 012 980-011, flashing</p>	<p>Magnetic attachment 2XD 012 980-021, flashing</p>	<p>Warning effect </p> <p>Robustness </p> <p>Service life </p> <p>Suitable for continuous operation </p>
K-LED 1.2		<p>Fixed mounting (height 123 mm, Ø 169 mm) 2RL 012 983-301, rotating 2XD 012 984-301, flashing</p>	<p>Pipe-socket mounting 2RL 012 983-401, rotating 2XD 012 984-401, flashing</p>	<p>Magnetic attachment On request, rotating On request, flashing</p>	<p>Warning effect </p> <p>Robustness </p> <p>Service life </p> <p>Suitable for continuous operation </p>
K-LED 2.0**		<p>Fixed mounting (height 88 mm, Ø 169 mm) 2XD 011 557-101, rotating and flashing 2XD 011 557-841, black housing</p>	<p>Pipe-socket mounting 2XD 011 557-201, rotating and flashing 2XD 011 557-811, black housing</p>	<p>Magnetic attachment 2XD 011 557-301, rotating, and flashing</p>	<p>Warning effect </p> <p>Robustness </p> <p>Service life </p> <p>Suitable for continuous operation </p>
** = Airport version also available					
HALOGEN					
KL 7000		<p>Fixed mounting (height 194 mm, Ø 155 mm) 2RL 008 061-101, 12 V 2RL 008 061-111, 24 V 2RL 008 064-101, 230 V</p>	<p>Pipe-socket mounting 2RL 008 060-101, 12 V 2RL 008 060-111, 24 V Flexible pipe-socket mounting 2RL 008 063-101, 12 V 2RL 008 063-111, 24 V</p>	<p>Magnetic attachment 2RL 008 062-101, 12 V 2RL 008 062-111, 24 V</p>	<p>Warning effect </p> <p>Robustness </p> <p>Service life </p> <p>Suitable for continuous operation </p>
Rotafix / Rotaflex		<p>Fixed mounting (height 174 mm, Ø 130 mm) 2RL 007 337-001, 12 V 2RL 007 337-011, 24 V</p>	<p>Flexible pipe-socket mounting 2RL 006 846-001, 12 V 2RL 006 846-011, 24 V</p>	<p>Magnetic attachment 2RL 007 337-021, 12 V 2RL 007 337-031, 24 V</p>	<p>Warning effect </p> <p>Robustness </p> <p>Service life </p> <p>Suitable for continuous operation </p>
Rota Compact		<p>Fixed mounting (height 157 mm, Ø 132 mm) 2RL 009 506-201, 12 V 2RL 009 506-211, 24 V</p>	<p>Flexible pipe-socket mounting 2RL 009 506-001, 12 V 2RL 009 506-011, 24 V</p>	<p>Magnetic attachment 2RL 009 506-301, 12 V 2RL 009 506-311, 24 V</p>	<p>Warning effect </p> <p>Robustness </p> <p>Service life </p> <p>Suitable for continuous operation </p>

Other colours available on request.


ACCESSORIES

<p>1-pin, 8HG 002 365-001 2-pin, 8HG 006 294-101</p>	<p>1-pin, 8HG 006 294-031 2-pin, 8HG 006 294-141</p>	<p>1-pin, 8HG 006 294-041 2-pin, on request</p>
<p>1-pin, 8HG 006 294-011 2-pin, on request</p>	<p>Distance 50 mm, height 100 mm 1-pin, 8HG 006 294-111</p>	<p>Pipe socket adapter K-LED 1.2 and 2.0: 8HG 005 436-041 RotaLED Compact: 8HG 223 805-001 K-LED Blizzard: 8HG 863 302-021 K-LED Rebelution: 8HG 863 302-021</p>
<p>1-pin, 8HG 006 294-051 2-pin, 8HG 006 294-091</p>	<p>Distance 90 mm, height 100 mm 1-pin, 8HG 006 294-021</p>	
	<p>Distance 120 mm, height 105 mm, for RotaLED Compact 1-pin, 8HG 006 294-171</p>	

KEY

	Board voltage: defines the power supply of the light: multi-voltage is the most flexible		Approval for dangerous goods transports in accordance with the Ordinance of Dangerous Goods by Road (ADR, The Carriage of Dangerous Goods by Road, in German GGVS)
	Resistant to high-pressure jet cleaners		Electromagnetic compatibility (EMC) tested and EU type approval issued
	Dust and water protection IP in accordance with DIN 40050 Part 9. Specific definition for road vehicles.		Even if the connecting cable is connected the wrong way round, there is still no danger for the electronics
	Rotating warning signal		Maximum speed allowed for magnetic attachments
	Flashing warning signal		

THE BEAUTY FOR YOUR BEAST.

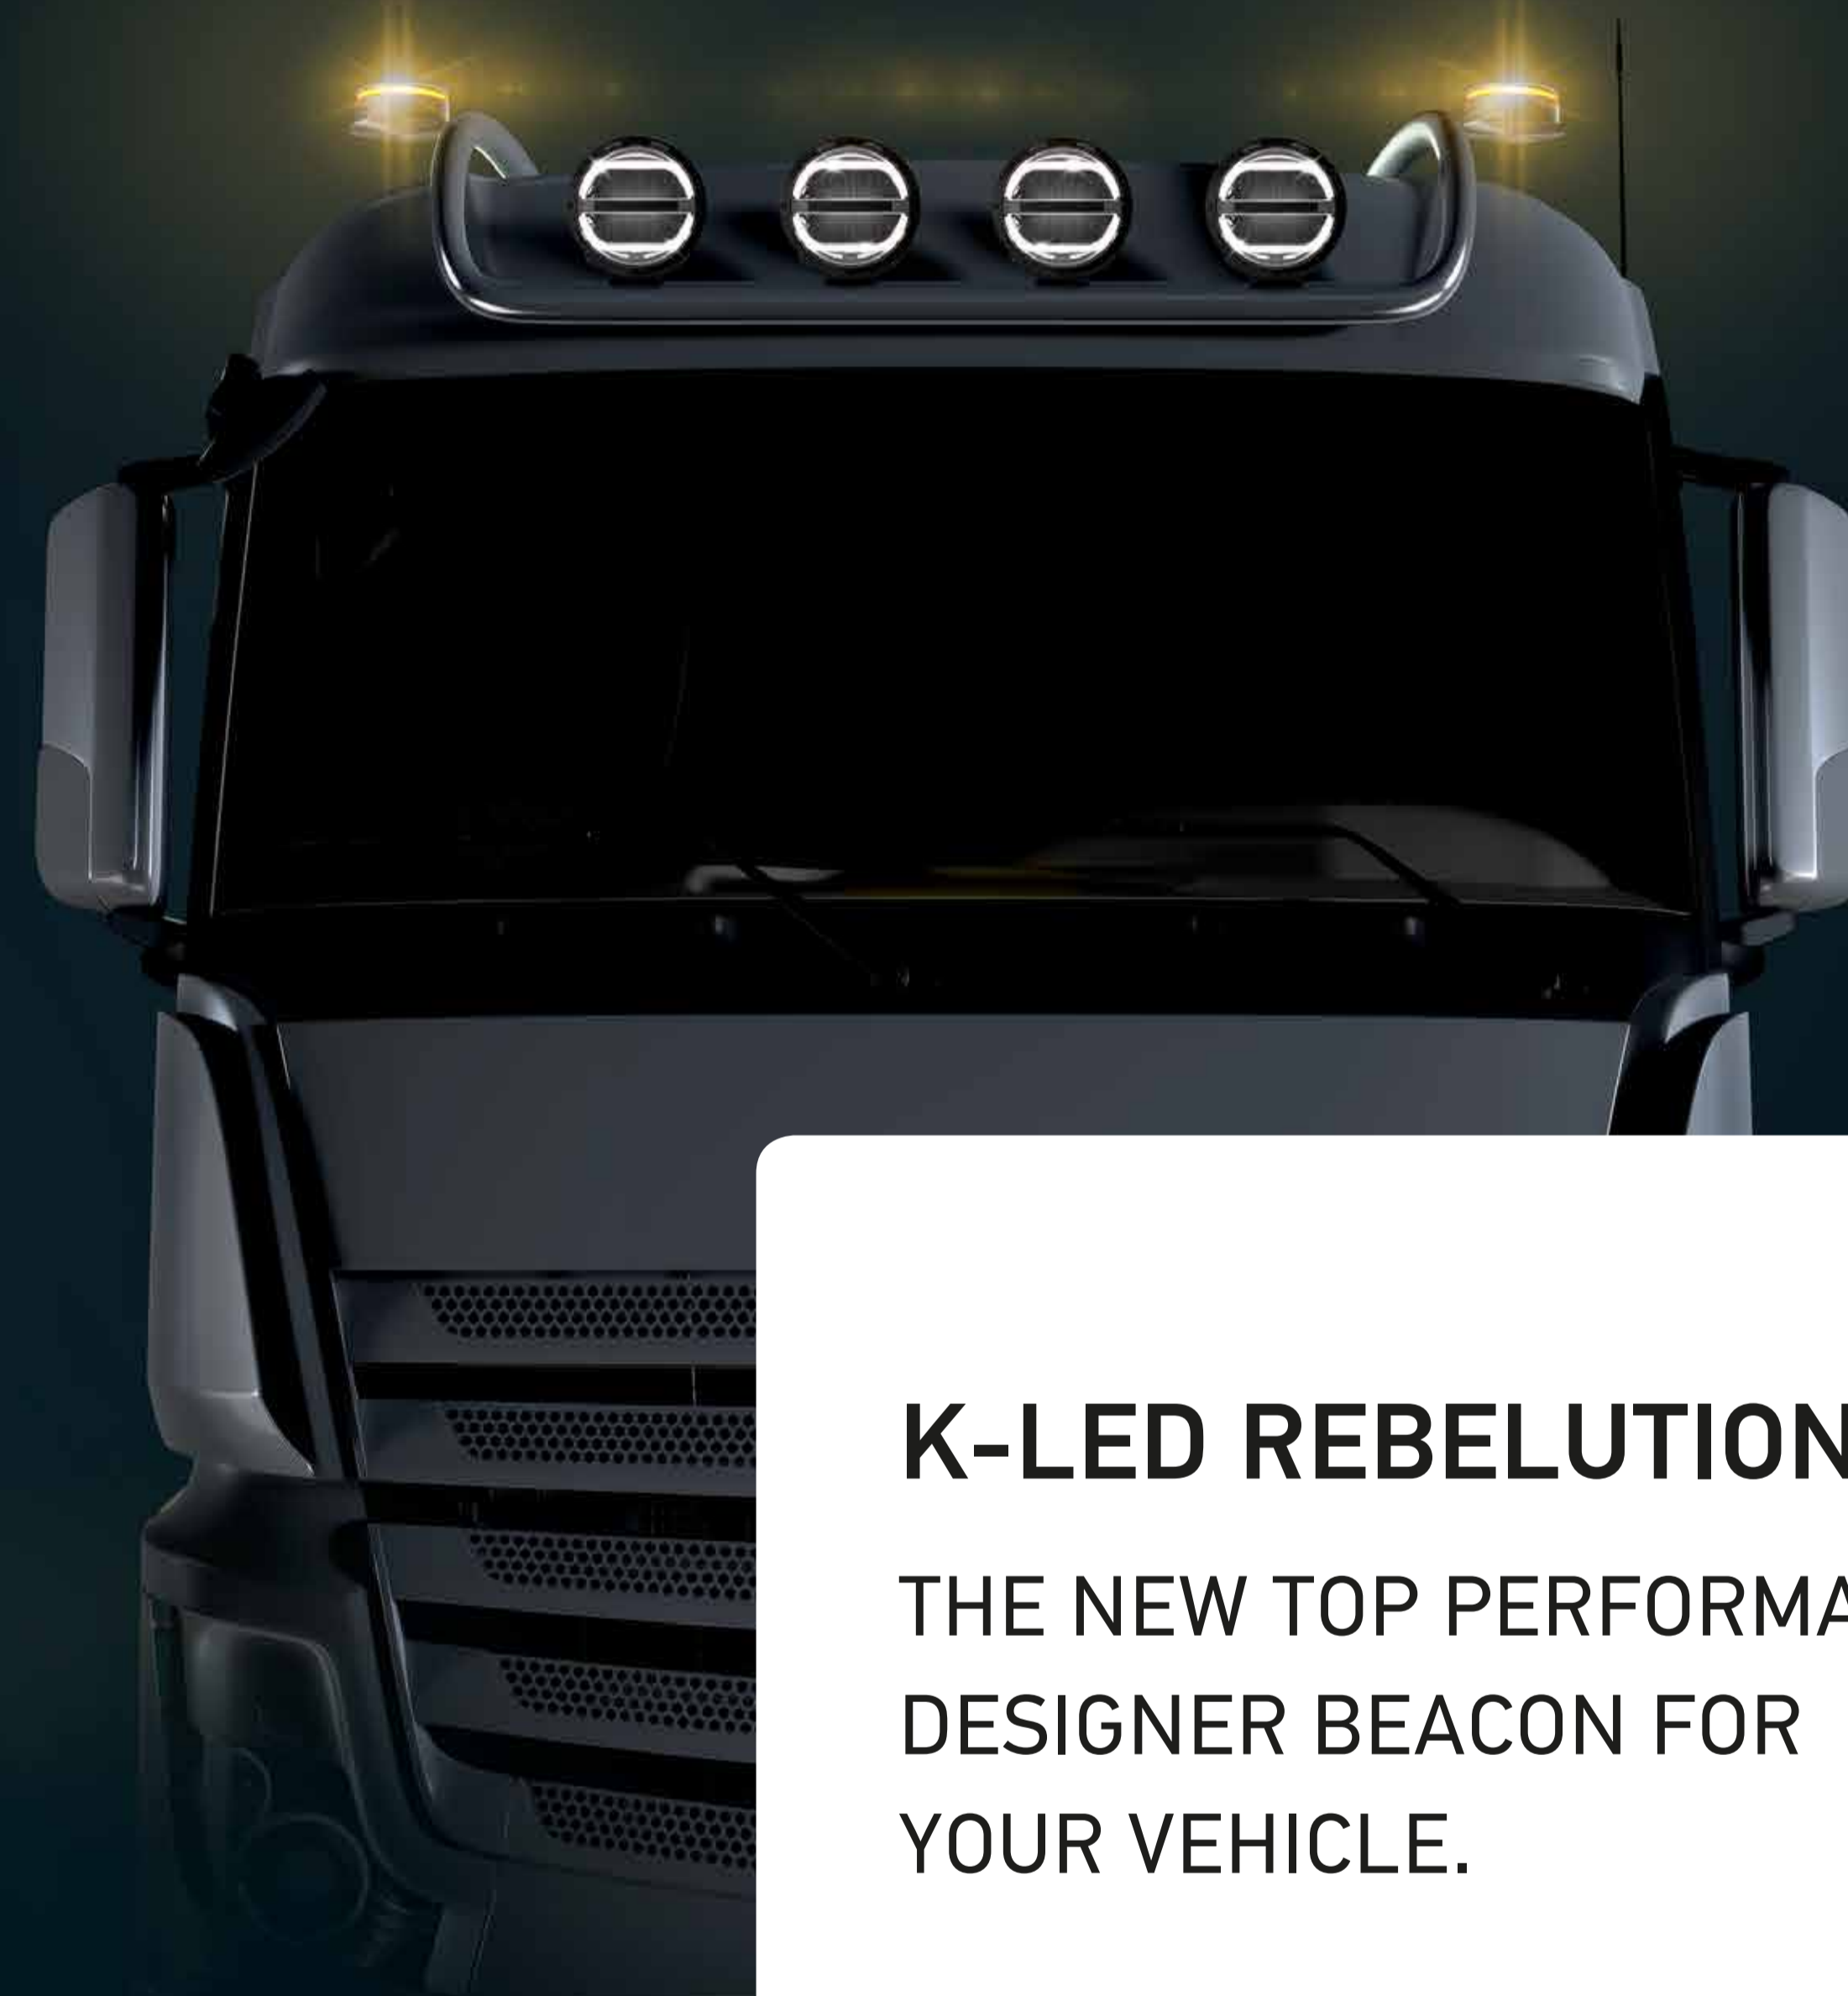

K-LED REBELUTION:

THE NEW TOP PERFORMANCE
DESIGNER BEACON FOR
YOUR VEHICLE.

